

MAXIMATOR®

maximum pressure


Technical Data Sheet

M111D

» Oil service

M111DVE

» Water service

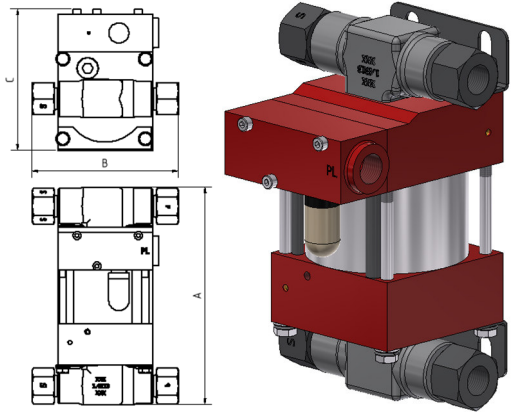

M111D
double acting, single air drive head
(Standard= Side inlet)

Technical Data:

Air drive pressure: 1 - 10 bar / 14.5 - 145 psi

Calculated working pressure: 1300 bar / 18850 psi

Pressure ratio: 1:130

Displacement volume/double stroke: 2.0 cm³ / 0.12 cu.inch

Connections:

Inlet: Standard: Side Inlet 3/8" BSP

Outlet: 3/8" BSP

Air drive: 3/8" BSP

Maximum operating temperature: 60°C

Net weight: 3.7 kg

Pressure and flow performances, please see enclosed graph.

Wetted materials of construction:

Seal package: M111D: Polyurethane
M111DVE: UHMWPE, FKM

Pump Body: 1.4313

Piston: 1.4112

Fittings: 1.4542

Approximate Dimensions:

A: 185 mm

B: 124 mm

C: 120 mm

Available Options:

Seal material for oil service: M111D

Seal material for water service: M111DVE

Liquid inlet: Standard: side inlet, bottom inlet
not available

Special inlet and outlet ports, i.e. NPT: M111D-NPT
M111DVE-NPT

Special seal material to handle special fluids on request.

Available Accessories:

Air control units for M series with filter pressure regulator, control pressure gauge and shut off valve: M111D with C1

To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line. M111D with C1/SV-air (The required outlet pressure has to be indicated.)

Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

Leistungsdigramm/Performance Graph M(O) 111 D

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

