


MAXIMATOR®

maximum pressure

Technical Data Sheet

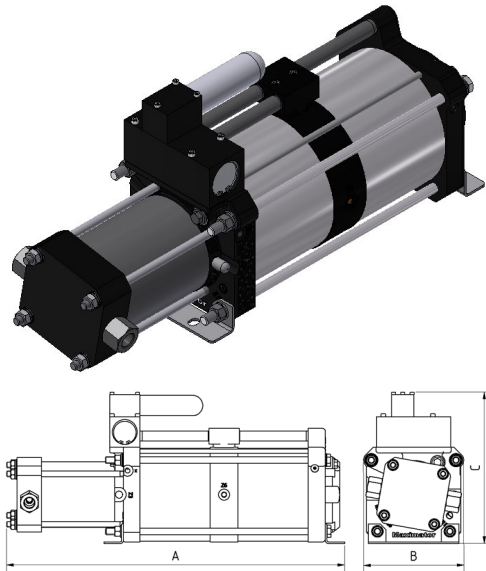

DLE 2-1-2
single acting, single air drive head
single stage

Gas booster DLE 2-1-2

Technical Data:

Air drive pressure p _L :	1 - 10 bar / 14.5 - 145 psi
Pressure ratio i:	1:4
Compression ratio:	1:10
Minimum suction pressure p _A :	0
Maximum suction pressure p _A :	40 bar
Maximum outlet pressure p _B :	40 bar
Displacement volume/double stroke:	922 cm ³
Maximum cycles:	100 / min
Stall pressure:	p _B = i * p _L

Standard Connections:

Air drive:	3/4" BSP
DLE 2-1-2 (-GG):	Inlet / Outlet: 1/2" BSP
Maximum operating temperature:	60°C
Net weight:	25.7 kg

Pressure and flow performances, please see enclosed graph.

Materials of construction hp section DLE 2-1-2:

Standard seal package:	PTFE, FKM
Compressor head:	3.1645
HP cylinder:	1.4404
HP piston:	1.4404
Fittings:	1.4404
Balls:	1.4034
Springs:	1.4310

Approximate Dimensions:

A:	611 mm
B:	181 mm
C:	272 mm

Available Options:

Inert gas service (standard):	DLE 2-1-2 (-GG)
Oxygen service:	DLE 2-1-2-GG-S
CO ₂ service:	DLE 2-1-2-GG-C
In-/Outlet: 1" NPT / 3/4" NPT	DLE 2-1-2-NN

Available Accessories:

Air control units with filter pressure regulator, control pressure gauge and shut off valve:	DLE 2-1-2 with C2
To protect the booster against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line.	DLE 2-1-2 with C2 / SV-air (The required outlet pressure has to be indicated.)

Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

