


MAXIMATOR®

maximum pressure

Technical Data Sheet

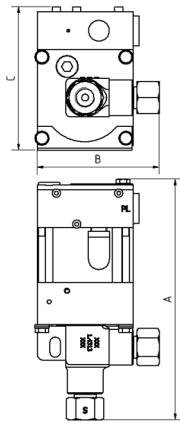

M72 (L)
single acting, single air drive head
(Standard= Bottom inlet)

M72 (L)

» Oil service

M72 (L) VE

» Water service

Technical Data:

Air drive pressure:	1 - 10 bar / 14.5 - 145 psi
Calculated working pressure:	860 bar / 12470 psi
Pressure ratio:	1:86
Displacement volume/double stroke:	1.5 cm ³ / 0.09 cu.inch

Connections:

Inlet:	Standard: Bottom Inlet 3/8" BSP
Outlet:	3/8" BSP
Air drive:	3/8" BSP
Maximum operating temperature:	60°C
Net weight:	2.8 kg

Pressure and flow performances, please see enclosed graph.

Wetted materials of construction:

Seal package:	M72(L): Polyurethane M72(L)VE: UHMWPE, FKM
Pump Body:	1.4313
Piston:	1.4112
Fittings:	1.4104

Approximate Dimensions:

A:	202 mm
B:	102 mm
C:	120 mm

Available Options:

Seal material for oil service:	M72(L)
Seal material for water service:	M72(L)VE
Side inlet:	M72(L)S/ M72(L)VES
Hand lever/ Spring return:	M72-HL (only available with seal package Polyurethane, NBR)
External pilot port modification:	M72(L)-DIR
Special inlet and outlet ports, i.e. NPT:	M72(L)-NPT M72(L)VE-NPT
Special seal material to handle special fluids on request.	

Available Accessories:

Air control units for M series with filter pressure regulator, control pressure gauge and shut off valve:	M72(L) with C1
To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line.	M72(L) with C1/SV-air (The required outlet pressure has to be indicated.)

Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability,

Leistungsdigramm/Performance Graph M(O)(SF) 72

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

