


Technical Data Sheet

S250 SS

» Water service

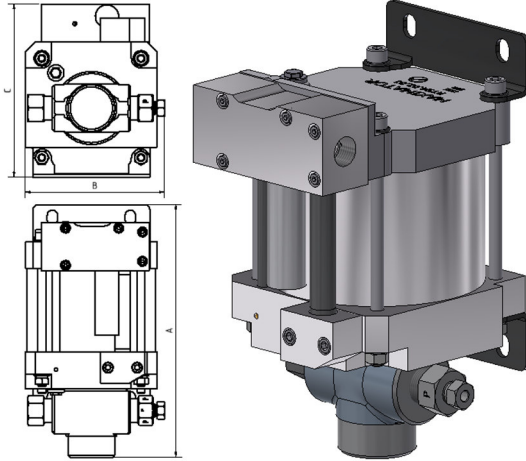

S250-SS

single acting, single air drive head

Technical Data:

Air drive pressure:	1 - 10 bar / 14.5 - 145 psi
Calculated working pressure:	2400 bar / 34800 psi
Pressure ratio:	1:244
Displacement volume/double stroke:	2.0 cm³ / 0.12 cu.inch

Connections:

Inlet:	1/4" BSP
Outlet:	9/16-18 UNF (4H)
Air drive:	1/2" BSP
Maximum operating temperature:	60°C
Net weight:	7 kg

Pressure and flow performances, please see enclosed graph.

Wetted materials of construction:

Top cap:	3.4311.01
Air cylinder:	3.3206
Seal package:	Polyurethane
Pump Body:	1.4313
HP Piston:	1.4112

Approximate Dimensions:

A:	259 mm
B:	143 mm
C:	177.5 mm

Available Accessories:

Air control units with filter pressure regulator, control pressure gauge and shut off valve:	S250-SS with C1.5
To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line.	S250-SS with C1.5/SV-air (The required outlet pressure has to be indicated.)

Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

Leistungsdigramm/Performance Graph S 250 SS

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

Werte berechnet/ calculated values

