

MAXIMATOR®

maximum pressure


Technical Data Sheet

M8 (L)

» Oil service

M8 (L) VE

» Water service

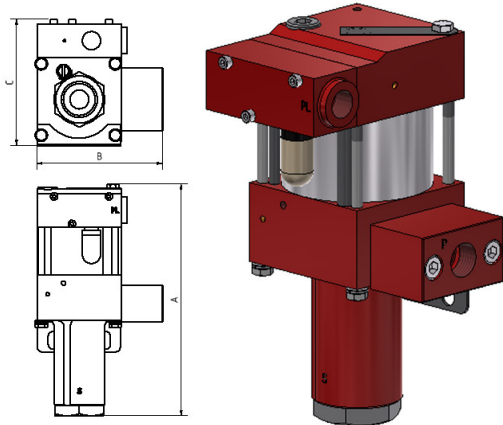

M8 (L)
single acting, single air drive head
(Standard= Bottom inlet)

Technical Data:

Air drive pressure:	1 - 10 bar / 14.5 - 145 psi
Calculated working pressure:	90 bar / 1305 psi
Pressure ratio:	1:9
Displacement volume/double stroke:	14.7 cm³ / 0.09 cu.inch

Connections:

Inlet:	Standard: Bottom Inlet 3/4" BSP
Outlet:	1/2" BSP
Air drive:	3/8" BSP
Maximum operating temperature:	60°C
Net weight:	3.0 kg

Pressure and flow performances, please see enclosed graph.

Wetted materials of construction:

Seal package:	M8(L): Polyurethane, NBR M8(L)VE: UHMWPE, FKM
---------------	--

Pump Body:	3.1645
------------	--------

Piston:	1.4112
---------	--------

Fittings:	Inlet: 1.4305 Outlet: 3.1645
-----------	---------------------------------

Approximate Dimensions:

A:	214 mm
B:	120 mm
C:	121 mm

Available Options:

Seal material for oil service:	M8(L)
Seal material for water service:	M8(L)VE
Special inlet and outlet ports, i.e. NPT:	M8(L)-NPT M8(L)VE-NPT
Special seal material to handle special fluids on request.	

Available Accessories:

Air control units for M series with filter pressure regulator, control pressure gauge and shut off valve:	M8(L) with C1
To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line:	M8(L) with C1/SVair (The required outlet pressure has to be indicated.)

Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

Leistungsdigramm/Performance Graph M(O)(SF) 8

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

