

MAXIMATOR®

Maximum Pressure.



High Pressure Technology • Testing Equipment
Hydraulics • Pneumatics

How do you sustainably test
your alternative fuel components?

H
CO₂

» With high pressure.

Contents :	Page :
About Maximator	2
Components	3
Systems - Research & Development	4
Systems - End of Line	5
Service - Regulations / Burst and proof pressure / Pressure cycle test	6
Service - Extreme temperature pressure cycle test / Hydrogen cycle test / Bonfire and penetration test	7
Contact	8

Your partner for high-pressure and testing technology

MAXIMATOR GmbH successfully develops complex systems in high-pressure and testing technology, hydraulics and pneumatics and has been the market leader in these segments for decades.

As a specialist for high-pressure equipment up to 25.000 bar, we are a partner to reputed companies in the automotive and supplier industry, and in the chemicals, plastics, oil and gas sectors.

Maximator has many years of experience with components, power units and systems. We give professional advice, plan projects and supply testing and manufacturing systems. We also develop special solutions precisely customised to the requirements of our customers.

Our high-performance service department not only carries out the installation and maintenance of the machines, we also inspect and retrofit our products, both nationally and internationally.

In our own testing laboratories it is possible to test the product before the start of the project; we also carry out exceptional individual and series testing.

Hydrogen technology reduces CO₂ output - But is it safe?

Many components for the development of this future technology are exposed to extreme stresses. Maximator meets this challenge with innovative high pressure test technology for hydrogen components such as valves, pipes or composite pressure vessels.

We can carry out all legally prescribed testing on pressure components with our test technology: from individual acceptance to type approval testing. We also offer gas control technology for hydrogen applications - approved effective and reliable technology for automotive manufacturers and suppliers.

Join us on our journey into a clean and save future.

Components



Electro Hydraulic Booster



Check valves



Air operated valves

Pressure generation

Technical specifications:

- Double acting reciprocating piston booster
- Electro hydraulic linear drive with high energy efficiency and high force
- Use of flushing ports avoids the formation of explosive H₂ concentrations
- Pressure ranges up to 1.050 bar
- CE Ex II 2G/2D IIC compliant version will be available soon

Direction related shut-off

Technical specifications:

- Highly reliable because of special cone shaped poppet/ seal combination for low leak rates across the orifice
- PEEK seal enables use in wide temperature range from - 50°C up to + 200°C
- Pressure range up to 1.550 bar

Air operated shut-off

Technical specifications:

- Compact air operated valve in normally closed (N.C) and normally open (N.O.) design
- Temperature ranges from - 40°C to + 85°C for bank operation and from - 73°C to + 85°C for dispenser operation
- Mechanical open/close indication
- CE Ex II 2G/2D IIC compliant
- Required actuation pressure 2 to 10 bar
- Pressure range up to 1.050 bar

In addition to our standard gas booster, valves, fittings and tubing portfolio, specific products for hydrogen applications have been designed. These meet the requirements regarding safety, reliability and durability of typical hydrogen applications. For the completion of high pressure instrumentations the standard hand operated valves, fittings and tubing are suitable. Please refer to the Maximator VFT catalog for further information. Materials are austenitic stainless steel grades which comply with EIGA and/or KHK requirements.

Solutions - Research & Development



Burst test chamber with sacrificial elements


Burst or proof test

Technical specifications:

- Pressure: up to 4.000 bar
- Fluid: e.g. water
- Volume: as required
- Diameter: as required
- Length: as required
- Pressure increase: controllable
- Pressure tolerance: < 1 bar
- MAXIMATOR software

Optional:

- Length-, circumference-, diameter-, volume-, temperature measurement
- High speed recording
- Mechanical treatment (e.g. torsion)

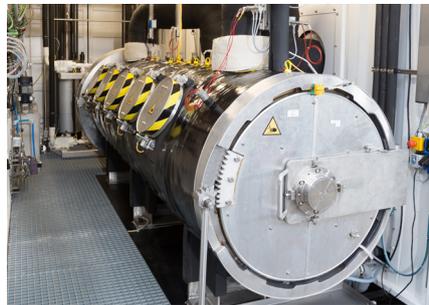

Extreme temperature pressure cycle test stand

Pressure cycle test

Technical specifications:

- Pressure: up to 1.400 bar
- Volume: as required
- Diameter: as required
- Length: as required
- Frequency: depending on specimen
- Pressure curve: e.g. sinus
- Pressure tolerance: < 1 bar
- Fluid: water glycol mixture or heat transfer fluid
- Ambient and fluid temperature: $\leq -40^{\circ}\text{C}$ up to $\geq +85^{\circ}\text{C}$
- Humidity: up to 98%
- MAXIMATOR software

Optional:

- Length-, circumference-, diameter-, volume-, temperature measurement
- Test chamber with or without temperature control
- High pressure heat exchanger



Leak test stand

Leak test

Technical specifications:

- Pressure: up to 1.050 bar
- Volume: as required
- Diameter: as required
- Length: as required
- Fluid: hydrogen or nitrogen mixture with tracer gas (e.g. helium)
- Measurement: local with sniffer
- MAXIMATOR software

Optional:

- Vacuum or accumulation chamber for integral measurement
- Gas pre-cooling
- Length-, circumference-, diameter-, volume-, temperature measurement

Solutions - End of Line



Proof pressure test

Proof pressure test

Technical specifications:

- Pressure: up to 1.050 bar
- Volume: as required
- Diameter: as required
- Length: as required
- Fluid: e.g. water
- Pressure increase: controllable
- Filling: automatic
- Draining: automatic
- MAXIMATOR software

Optional:

- Length-, weight-, circumference-, diameter-, volume-, temperature measurement
- Communication with superior production system
- Automatic loading or coupling process
- Disassembly of tooling



Leak test stand

Leak test

Technical specifications:

- Pressure: up to 875 bar
- Volume: as required
- Diameter: as required
- Length: as required
- Fluid: hydrogen or nitrogen mixture with tracer gas (e.g. helium)
- Measurement: local or integral with vacuum or accumulation chamber
- MAXIMATOR software

Optional:

- Length-, circumference-, diameter-, volume-, temperature measurement
- Communication with superior production system
- Gas pre-cooling
- Automation (e.g. with robots)



Burst pressure stand

Batch tests (burst, cycle, torque)

Technical specifications:

- Pressure (burst): up to 2.000 bar
- Pressure (cycle): up to 1.050 bar
- Volumen: as required
- Diameter: as required
- Length: as required
- Fluid (burst): water
- Fluid (cycle): water glycol mixture
- Pressure increase: controllable
- Pressure curve (cycle): sinus
- MAXIMATOR software

Optional:

- Length-, circumference-, diameter-, volume-, temperature measurement
- Communication with superior production system
- High speed recording


Solutions - MAXIFES

SAE J2601 ECE R07
DIN EN 12245
EU406/2010 EC79/2009
ECE R110 ISO 11119-3
ISO 11439 ECE R134
UN GTR No. 13 NGV 2 / 3.

Common regulations



High speed recording of burst process

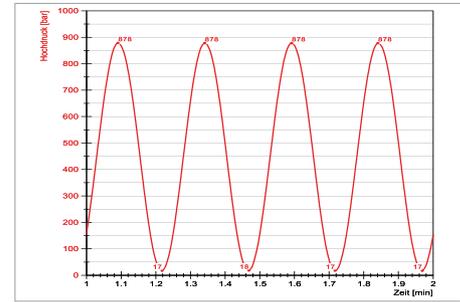

Reproducible sinus curve

Regulations

Short overview:

- EC79/2009
- EU406/2010
- ECE R110
- ECE R134
- DIN EN 12245
- DIN EN 14427
- DIN EN 17339
- HG2 / 3.1
- NGV 2 / 3.1
- UN GTR No. 13
- ISO 11119-3
- ISO 11439
- ISO 15869
- SAE J2579
- SAE J2601

Not limited to above mentioned regulations.
More on request.

Burst or proof pressure test

Technical specifications:

- Pressure: up to 4.000 bar
- Fluid: e.g. water
- Volume: up to 800 l
- Diameter: up to 1.000 mm
- Length: up to 4.000 mm
- Pressure increase: controllable
- Pressure tolerance: < 1 bar
- Temperature: + 20° ± 5°C

Optional:

- Length-, circumference-, diameter-, volume-, temperature measurement
- Test within temperature chamber
- High speed recording
- Laser optical 3D deformation measurement
- Torsional moment up to 10.000 Nm
- Bending moment up to 15.000 N

Pressure cycle test

Technical specifications:

- Pressure: up to 1.400 bar
- Volume: up to 800 l
- Diameter: up to 1.000 mm
- Length: up to 4.000 mm
- Frequency: depending on specimen
- Pressure curve: e.g. sinus, trapezoid
- Pressure tolerance: < 1 bar
- Fluid: water glycol mixture
- Ambient temperature: + 20°C ± 5°C
- Fluid temperature: < + 40°C

Optional:

- Length-, circumference-, diameter-, volume-, temperature measurement
- Laser optical 3D deformation measurement
- Torsional moment up to 10.000 Nm
- Bending moment up to 15.000 N
- Pre-treatment (e.g. chemical, thermal, flaw, drop, crash)



Pressure intensifier



Safety chamber



Penetration test

Extreme temperature pressure cycle test

Technical specifications:

- Pressure: up to 1.400 bar
- Volume: up to 500 l
- Diameter: up to 1.000 mm
- Length: up to 4.000 mm
- Frequency: depending on specimen
- Pressure curve: e.g. sinus
- Pressure tolerance: < 1 bar
- Fluid: heat transfer fluid
- Ambient and fluid temperature: $\leq -40^{\circ}\text{C}$ up to $\geq +85^{\circ}\text{C}$
- Humidity: up to 98%

Optional:

- Length-, circumference-, diameter-, volume-, temperature measurement
- Pre-treatment (e.g. chemical, thermal, flaw, drop, crash)

Hydrogen cycle test

Technical specifications:

- Pressure: up to 1.050 bar
- Volume: up to 150 l (6 kg hydrogen)
- Diameter: up to 600 mm
- Length: up to 2.500 mm
- Frequency: < 1 cycle per hour
- Pressure tolerance: < 1 bar
- Fluid: hydrogen
- Ambient temperature: $\leq -60^{\circ}\text{C}$ up to $\geq +120^{\circ}\text{C}$
- Fluid temperature: $\leq -60^{\circ}\text{C}$ up to $\geq +60^{\circ}\text{C}$
- Humidity: up to 98%

Optional:

- Length-, circumference-, diameter measurement
- Pre-treatment (e.g. chemical, thermal, flaw, drop, crash)
- Hydrogen cycle test until major leak or rupture

Bonfire and penetration test

Technical specifications:

- Pressure: up to 1.050 bar
- Volume: up to 500 l
- Diameter: up to 1.000 mm
- Length: up to 4.000 mm
- Fluid (bonfire): hydrogen
- Fluid (penetration): nitrogen
- Temperature (bonfire): up to $+1.000^{\circ}\text{C}$
- Projectile: $\geq 7,62$ mm

Optional:

- Length-, circumference-, diameter measurement
- High speed recording
- Pre-treatment (e.g. chemical, thermal, flaw, drop, crash)
- Without OTV or TPRD



Fully automated leak test stand

Your contact for the next step:

Maximator GmbH
Patrick Schulte
Director Alternative Fuels
Mobile: +49 151 6515 8821
e-Mail: pschulte@maximator.de

www.maximator.de

